

**Pressure transmitter-Low cost**

**BT-PT-1100**

**BROIL**



**Constructive characteristics**

**Material in contact:** AISI316L  
**Case :** AISI304L  
**Protection:** IP65 / IP67  
**Weight:** 0.40 Kg  
**Process connection:** G1/4 or G1/2 or as on request

**Functional characteristics**

**Pressure range:** 0...0,25 / 0...2000 bar  
**Sensor class (included linearity and hysteresis):** 0.25%/0.5%/1%  
**Compensate temp. range:** -20..+100°C  
**Permitted temperature fluid:** -20..+100 °C  
**Zero drift:** = typical : 0.05% fs/10K  
**Sensibility drift:** = typical : 0.05% fs/10K  
**Zero offset:** =±0.5%FS  
**Max applicable pressure (without decay):** 2 time FS  
**Resistance to bursting:** 3 time FS

**Electrical Characteristics**

**Output signal:** 4..20 mA , 0..5 Vdc, 0..10 Vdc , other on request  
**Electrical connection:** cables, DIN43650 , 4 pole connector , other on request  
**Power supplier:** 12...30Vdc (current ) , 15..30 Vdc (Voltage)  
**CE conformity:** 89/336 CE (EN50082-1 e 2 EN50081-1 e 2); 97/23/CE :3.3 Ps<200 bar cat 1 - Ps=200 bar  
**Isolation resistance at 50 Vdc:** >1000MΩ  
**Response time(10..90%):** =10mS

# BROIL SENSOTEK INDUSTRIES,


I-195, GIDC-2 , MEHSANA-384002, STATE: GUJARAT, INDIA.

**Pressure transmitter**

**BT-PT-1100**

## Mechanical dimensions

**BROIL**

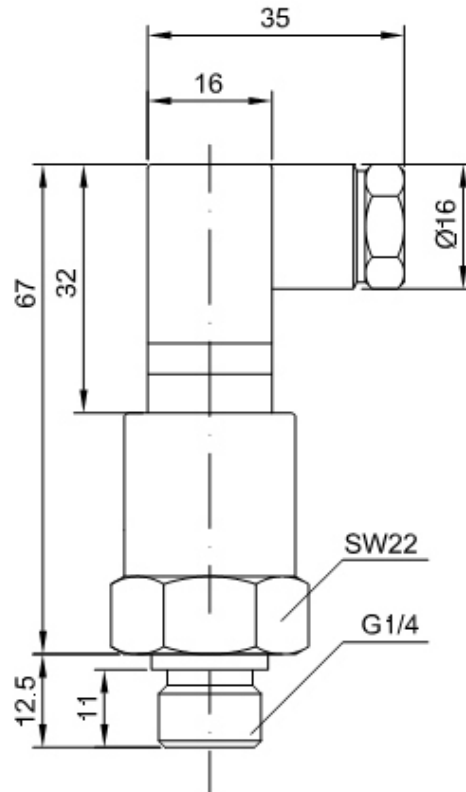

## Electrical connections

Electrical connections

	Terminal		
Power supply (output) 15..30Vdc (0..5-10Vdc)	Pin 1 (+) Pin 2 (-) Pin 3 (Out 0..5- 10Vdc)	Red (+) Yellow or black (-) white (Out 0..5- 10Vdc)	Pin 1 (+) Pin 2 (-) Pin 3 (Out 0..5- 10Vdc)
Power supply (output) 09..30Vdc (4..20 mA)	Pin 1 (+) Pin 2 (-)	Red(+) Giallo o Yellow or black (-)	Pin 1 (+) Pin 2 (-)
Draws			